
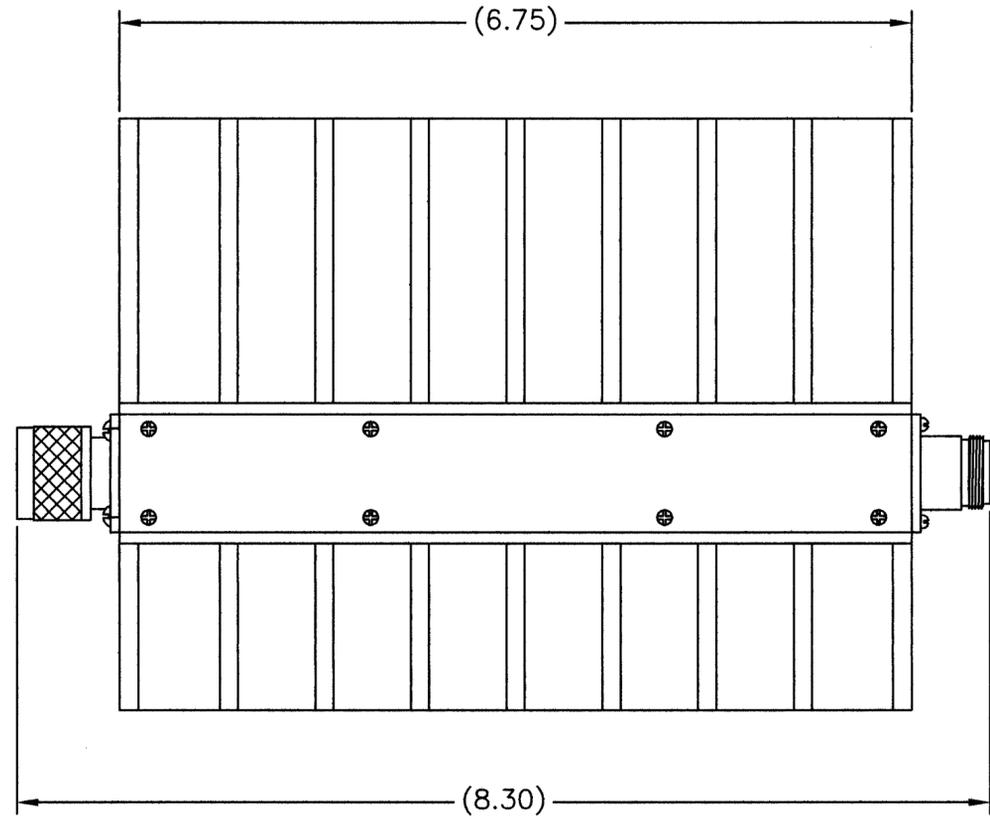


DIMENSIONS HEREON ARE FOR CUSTOMER CONVENIENCE AND REFERENCE ONLY. TOLERANCE TO BE APPLIED ONLY WHERE INDIVIDUALLY STATED ON THE RESPECTIVE DIMENSION. -DO NOT SCALE DRAWING-

REVISIONS		DWG. NO.	150-SA-MFN-XX	SHEET	REV
ZONE	REV	DESCRIPTION	DATE	1	A
	A	RELEASED TO PRODUCTION	12-14-98	APPROVED mbl	

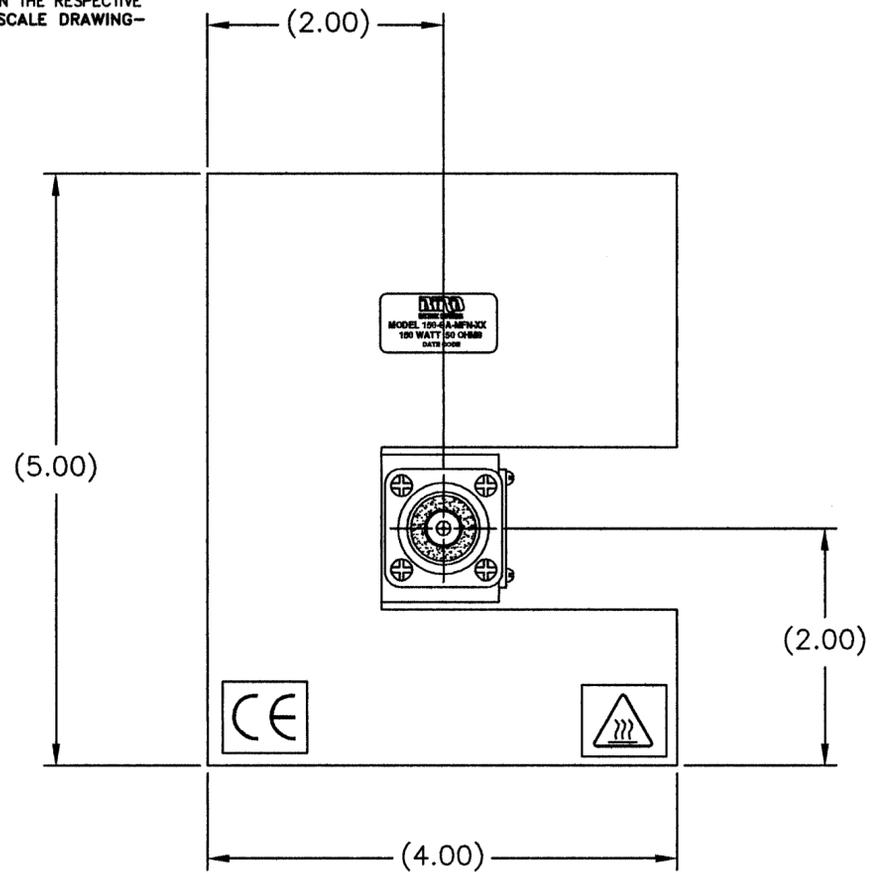


IMPEDANCE: 50 OHMS NOMINAL
 FREQUENCY RANGE: DC TO 2.4GHz
 VSWR: DC TO 1GHz AT 1.10:1 MAX.
 1GHz TO 2.4GHz AT 1.25:1 MAX.
 POWER RATING: 150 WATTS MAX. @ 40°C.
 180 WATTS MAX. @ 25°C.
 COOLING FIN: ALUMINUM, BLACK ANODIZED
 HEAT SPREADER: ALUMINUM, TRI-ALLOY PLATED
 CONNECTORS: N-TYPE MALE/FEMALE, TRI-ALLOY PLATED
 OPERATING POSITION: VERTICALLY
 NOMINAL SIZE: APPROX. 8.30" L. X 5.00" H X 4.00" W
 WEIGHT: APPROX. 5.5 LBS.

XX = DASH NUMBER

-30	30	±0.8 dB	±1.3 dB
-20	20	±0.5 dB	±1.0 dB
-10	10	±0.4 dB	±0.8 dB
-06	6	±0.4 dB	±0.6 dB
-03	3	±0.3 dB	±0.5 dB
-02	2	±0.3 dB	±0.5 dB
-01	1	±0.3 dB	±0.5 dB
DASH NO.	dB ATTEN.	DC - 1GHz ATTENUATOR	1 - 2.4GHz ACCURACY ±dB

MOUNTING HOLES
 4x 8-32UNC-2B x .200 DEEP

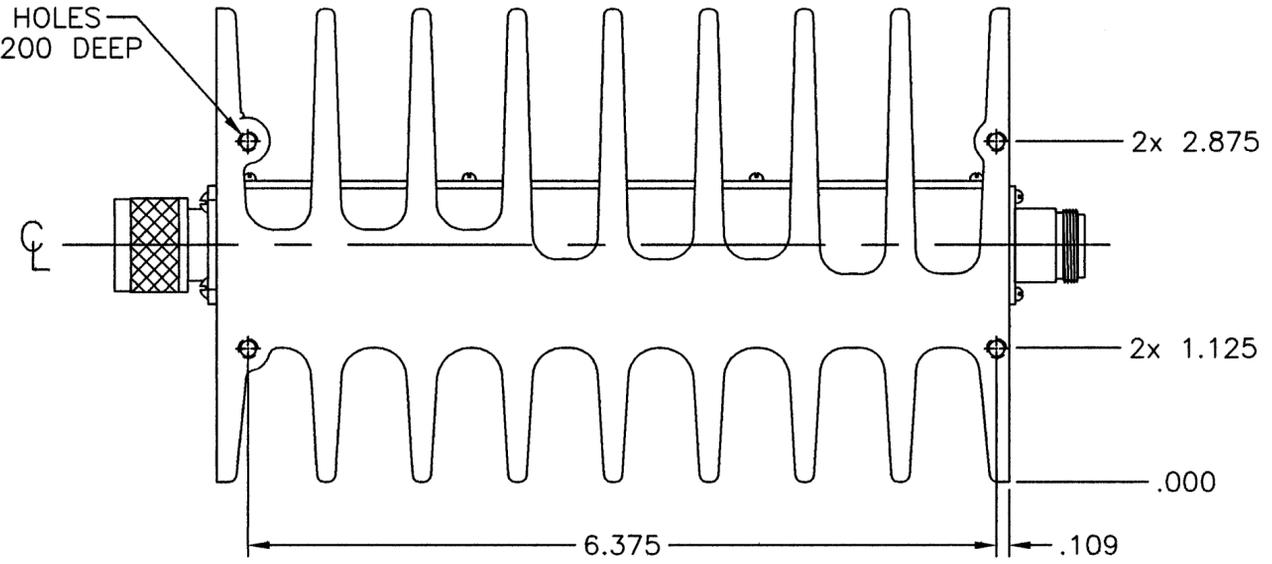

- NOTES:
- ☒ 1. PART MUST BE BURR FREE.
 - ☒ 2. CHAMFER 1st THREAD.
 - ☒ 3. 63 MICRINCH UNLESS OTHERWISE SPECIFIED.
 - ☐ 4. PER BPS
 - ☒ 5. .005 RADIUS ON ALL INSIDE & OUTSIDE CORNERS UNLESS OTHERWISE SPECIFIED.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE:		MILLIMETERS X = ±.4 XX = ±.12		THIS DRAWING IS THE PROPERTY OF THE BIRD ELECTRONIC CORPORATION. THE DESIGNS AND SPECIFICATIONS DISCLOSED HEREON ARE PROPRIETARY AND SHALL NOT BE REPRODUCED, NOR COPIED, NOR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT THEIR EXPRESS WRITTEN CONSENT.	
FRACTIONS ± 1/64	DECIMALS .XX = ±.010 .XXX = ±.005	ANGLES ± 30'	DO NOT SCALE DRAWING		
MATERIAL	APPROVALS	DATE	TITLE		
FINISH	D.M.RINK	11-22-02	ATTENUATOR, N-TYPE MALE/FEMALE, 150W		
	CHECKED		SIZE	FSCM NO.	DWG. NO.
	APPROVED	1-13-03	C	70998	150-SA-MFN-XX
		AUTOCAD	SCALE	1:1	COMM CODE AT1
			SHEET	1 OF 1	

