


DIMENSIONS HEREON ARE FOR CUSTOMER CONVENIENCE AND REFERENCE ONLY. TOLERANCE TO BE APPLIED ONLY WHERE INDIVIDUALLY STATED ON THE RESPECTIVE DIMENSION.

REVISIONS		DRAWING NO. 8201-000	
LTR.	DESCRIPTION	DATE	
D	REDRAWN PER ECN 5855 R.K.	5-26-87	
E	REVISED PER ECN 9914 F.K.	11-18-96	
F	REVISED PER ECN 10166 T.M.	9-26-97	
G	REVISED PER ECN 10585 J.P.	1-7-99	

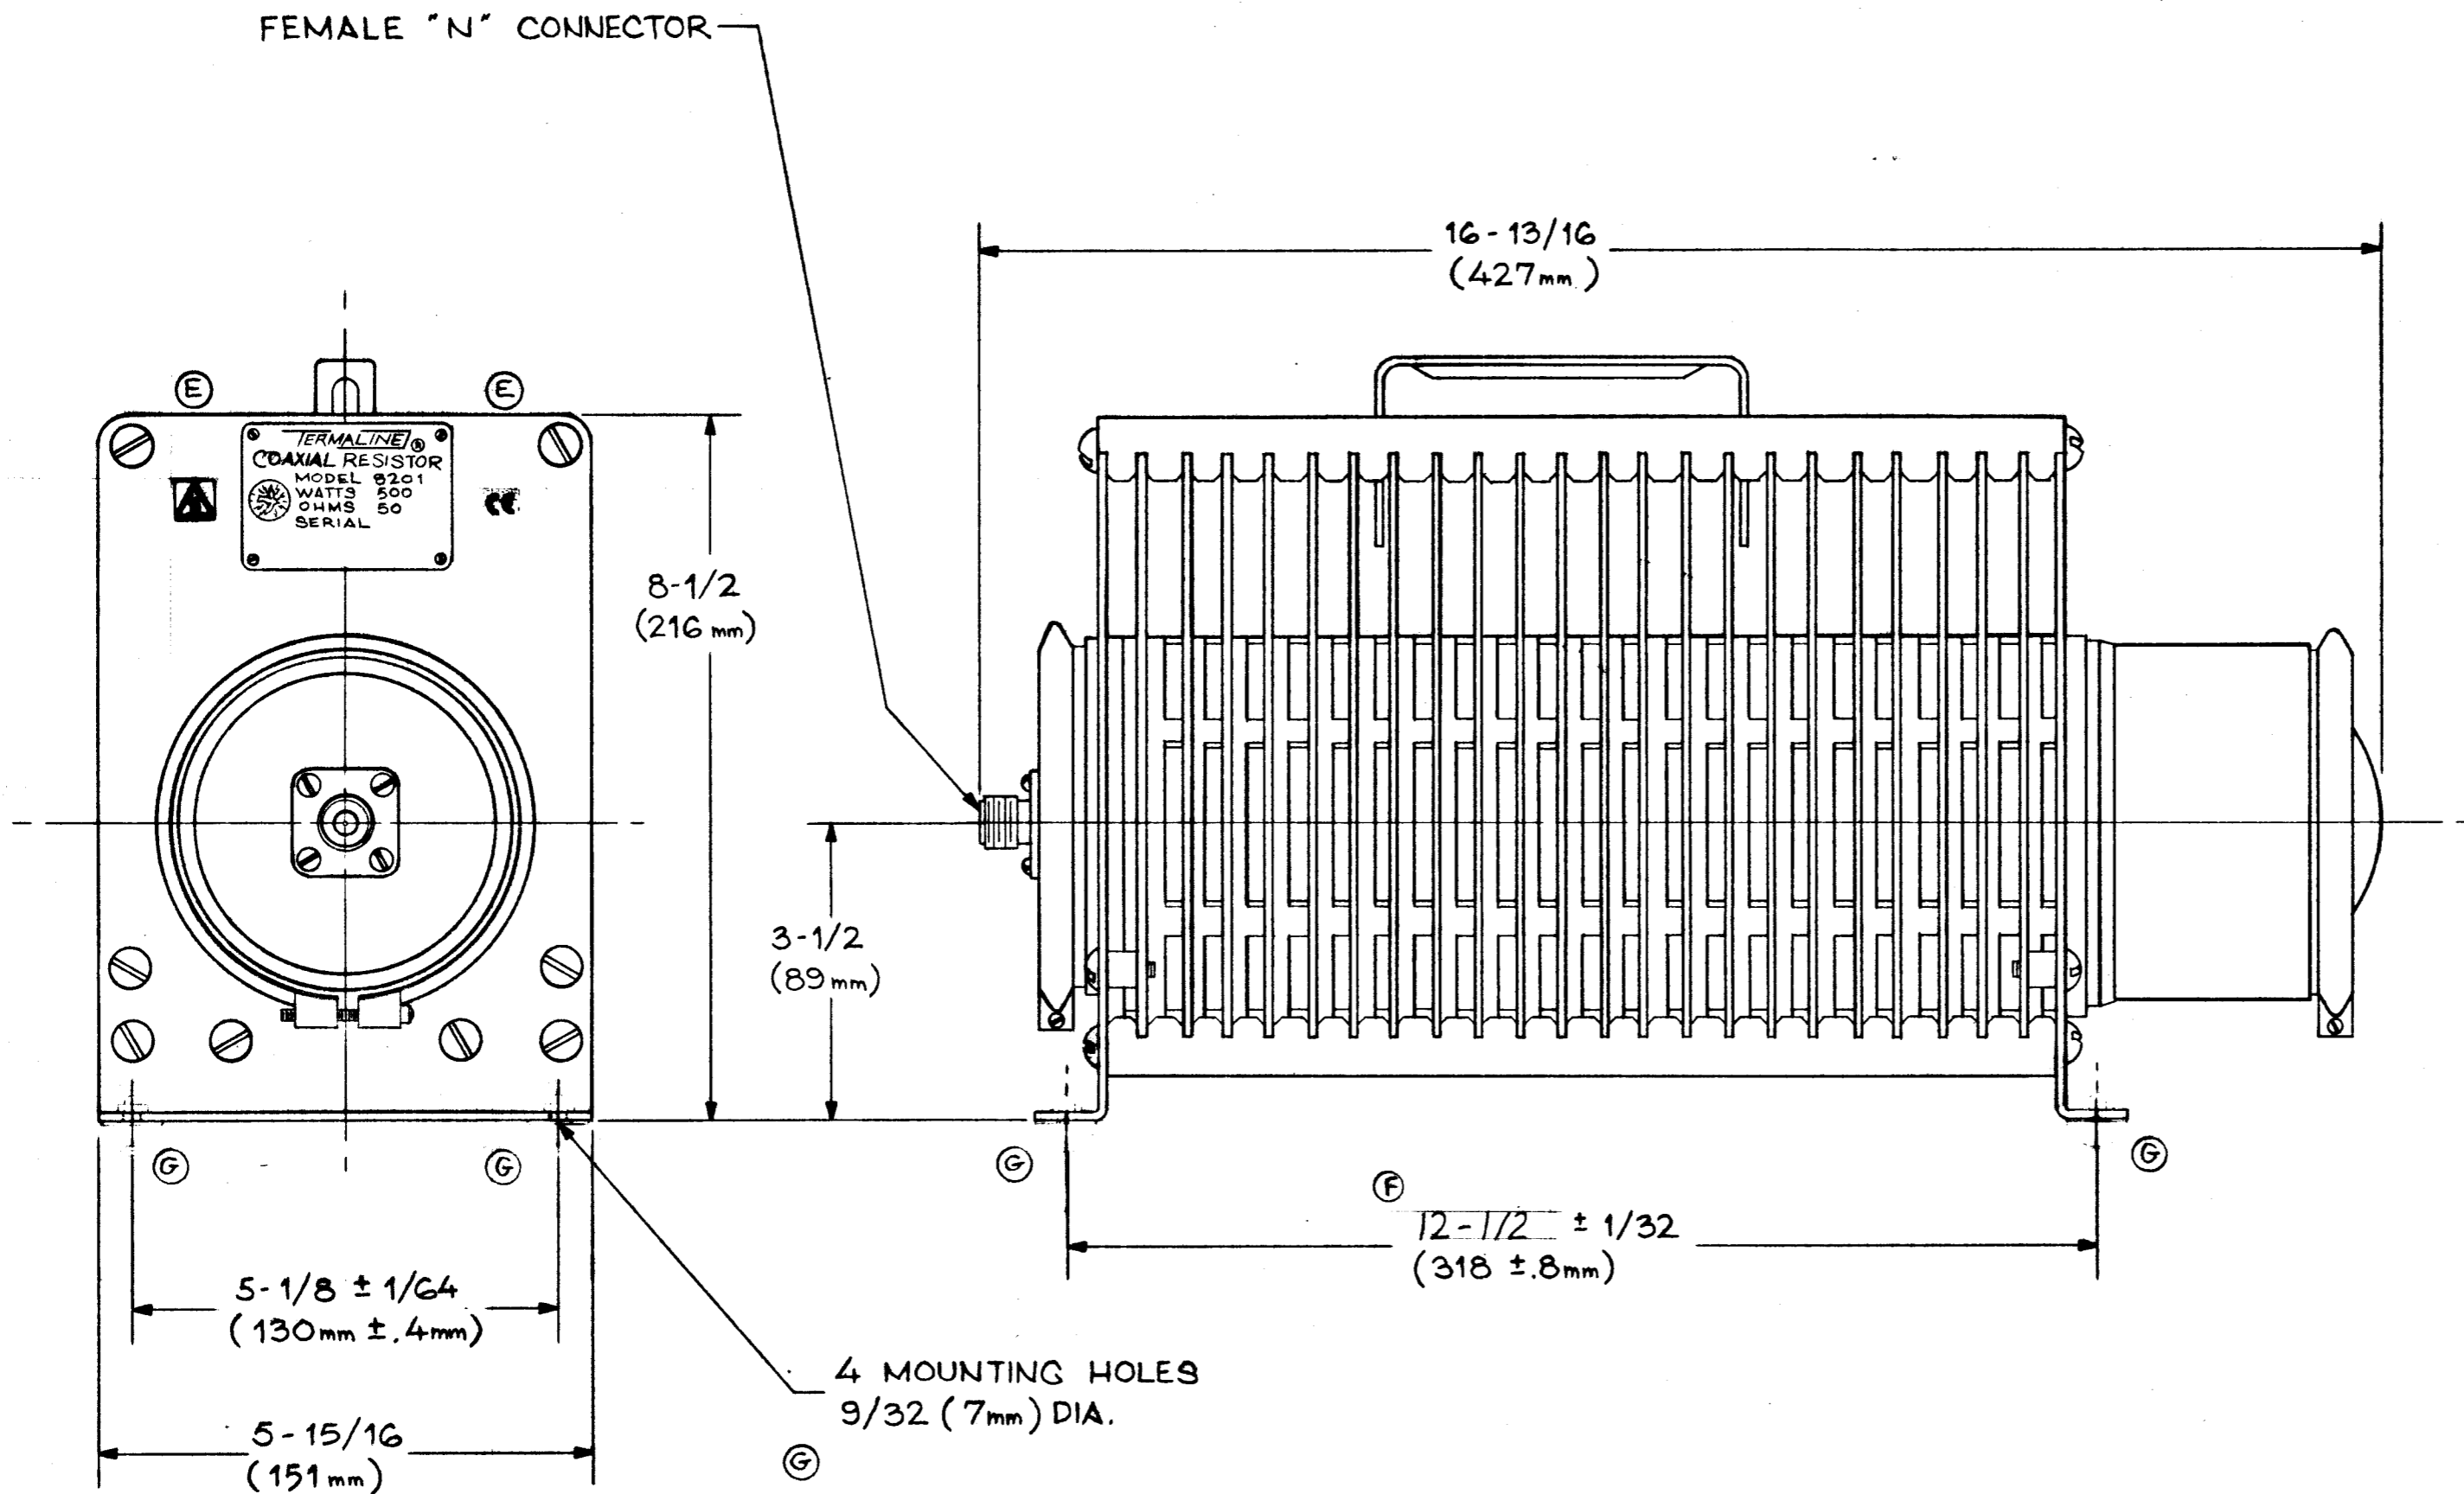


MODEL 8201 AIR COOLED COAXIAL LOAD RESISTOR

CHARACTERISTIC IMPEDANCE: 50 OHMS NOMINAL
 INPUT CONNECTOR: FEMALE "N" QUICK CHANGE TYPE
 POWER INPUT: 0-500 WATTS CONT. NO BLOWER
 FREQUENCY RANGE: DC-2500MHz
 VSWR: 1.1 TO 1000MHz, 1.25 TO 2500MHz
 OPERATING CONDITIONS:
 TEMPERATURE: +45°C MAX. TO -40°C MIN.
 WEIGHT: APPROX. 20lbs., 6ozs. (9.2KG.)

Ⓔ MEETS EUROPEAN SAFETY STANDARD EN 61010-1, WHICH IS IN ACCORDANCE WITH COUNCIL DIRECTIVE 73/23/EEC AND 93/68/EEC.

DIMENSIONS HEREON ARE FOR CUSTOMER CONVENIENCE AND REFERENCE ONLY. TOLERANCE TO BE APPLIED ONLY WHERE INDIVIDUALLY STATED ON THE RESPECTIVE DIMENSION. -DO NOT SCALE DRAWING-

USED ON	ITEM REQ	DRAWING NO.	DESCRIPTION
MATERIAL:			 BIRD Electronic Corporation Cleveland (Solon) Ohio USA
DRAWN R.A.K. 5-26-87 CHECKED R.A.K. 5-26-87 APPROVED D.L.A. 8-19-87			
FINISH			TITLE
GRAY PER BEC DRAWING 6-020			LOAD RESISTOR, TERMALINE, 500 WATTS, MODEL 8201 O/L
SCALE 1/2			SIZE
CODE IDENT. NO. 70998			DRAWING NO.
			8201-000