SPECIFICATIONS:
POWER: 250 W AVG. – 2KW PEAK
– WHEN MOUNTED TO A HEAT SINK CAPABLE OF MAINTAINING A CASE TEMPERATURE AT OR BELOW 100°C
FREQUENCY RANGE AND VSWR:
DC TO 1GHz AT 1.10:1 MAX.
1GHz TO 2.4GHz AT 1.25:1 MAX.
CONNECTOR: N–TYPE MALE
FINISH: BODY–SILVER OR TRI–ALLOY PLATED
CONNECTOR: SILVER OR TRI–ALLOY PLATED

REVISIONS		DWG. NO. 250–CT–MN	SHEET 1	REV B
REV	DESCRIPTION		DATE	APPROVED
A	CONVERT TO BEC FORMAT dmr		11–8–02	MRV
B	CHG OVERALL DIMENSIONS TO ±.010		7–17–07	DMD

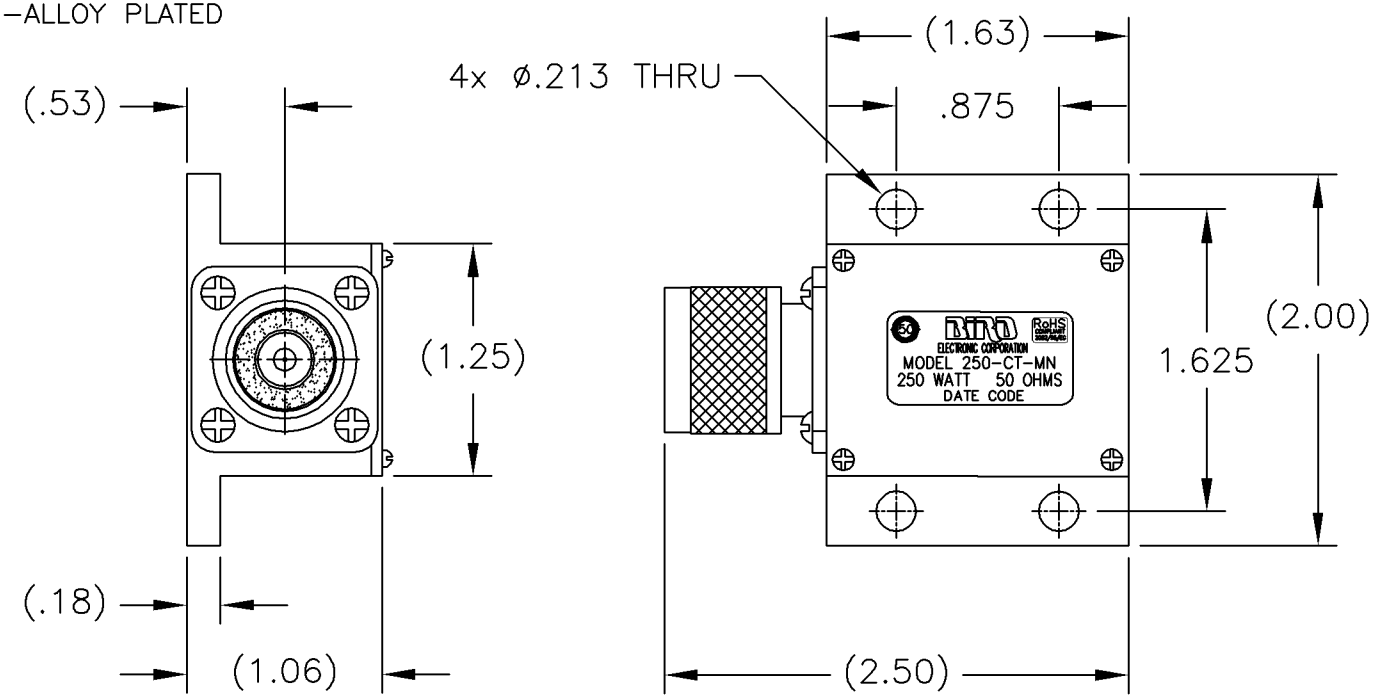

DIMENSIONS HEREON ARE FOR CUSTOMER CONVENIENCE AND REFERENCE ONLY. TOLERANCE TO BE APPLIED ONLY WHERE INDIVIDUALLY STATED ON THE RESPECTIVE DIMENSION. **–DO NOT SCALE DRAWING–**

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
FRACTIONS ±1/64 DECIMALS .XX= ±.010 .XXX= ±.005
ANGLES ±30' MILLIMETERS .X= ±.4 .XX= ±.12
DO NOT SCALE DRAWING

THIS DRAWING IS THE PROPERTY OF THE BIRD TECHNOLOGIES GROUP OR BIRD ELECTRONIC CORPORATION. THE DESIGNS AND SPECIFICATIONS DISCLOSED HEREIN ARE PROPRIETARY AND SHALL NOT BE REPRODUCED, NOR COPIED, NOR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT THEIR EXPRESS WRITTEN CONSENT.

APPROVALS		DATE
DRN	D.M.RINK	11–8–02
CHK		
APP	MARK V	1–13–03

MATERIAL CODE
FINISH CODE

BIRD® TECHNOLOGIES GROUP ELECTRONIC CORPORATION

TITLE TERMINATION, CONDUCTION COOLED N–TYPE MALE, 250W

A	FSCM NO. 70998	SCALE 1:1	DWG. NO. 250–CT–MN	REV B
PROJ./LIB AUTOCAD			COMM CODE LD1	SHEET 1 OF 1