

NOMINAL IMPEDANCE:.....50 Ω

DIELECTRIC WITHSTANDING VOLTAGE:..4kV rms


VOLTAGE RATING:.....2.7kV rms


BODY/OUTER CONTACTS:.....BRASS w/NICKEL PLATING


INSULATION:....TEFLON

INNER CONTACTS:.....BRASS w/GOLD PLATING

REVISIONS		DWG. NO. 4240-36-10 OL		SHEET 1	REV A
REV	REV DESCRIPTION			APPROVED	
Α	A RELEASE		8-10-21	T.S.	

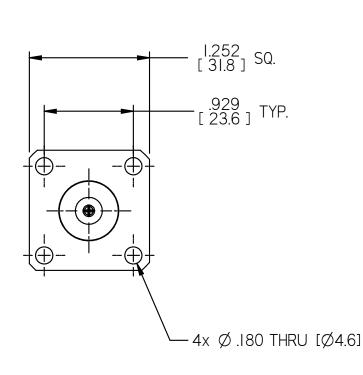

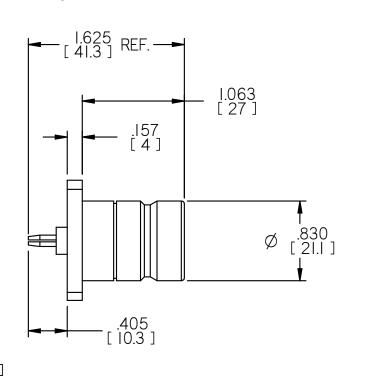



	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES				
TOLERANCES ARE:					

FRACTIONS ±1/64 DECIMALS .XX= ±.010 $.XXX=\pm.005$

MILLIMETERS .X= ±.4 ANGLES ±30' $.XX = \pm .12$

DO NOT SCALE DRAWING

THIS DRAWING IS THE PROPERTY OF THE BIRD TECHNOLOGIES GROUP OR BIRD ELECTRONIC CORP-ORATION. THE DESIGNS AND SPECIFICATIONS DISCLOSED HEREON ARE PROPRIETARY AND SHALL NOT BE REPRODUCED, NOR COPIED, NOR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT THEIR EXPRESS WRITTEN CONSENT.

AFFROVALS		DATE	
DRN hstamper		08-09-21	
CHK T. Smith		08-10-21	
APP T. Smith		08-10-21	
ΜΔΤΕΡΙΔΙ	CODE		

Bird TITLE

QC QUICK GQM CONNECTOR

4240-36-10 OL

SHEET

REV

Α

1 OF 1

FSCM NO. SCALE DWG. NO. CODE FINISH 70998 1/1 PROJ./LIB

