
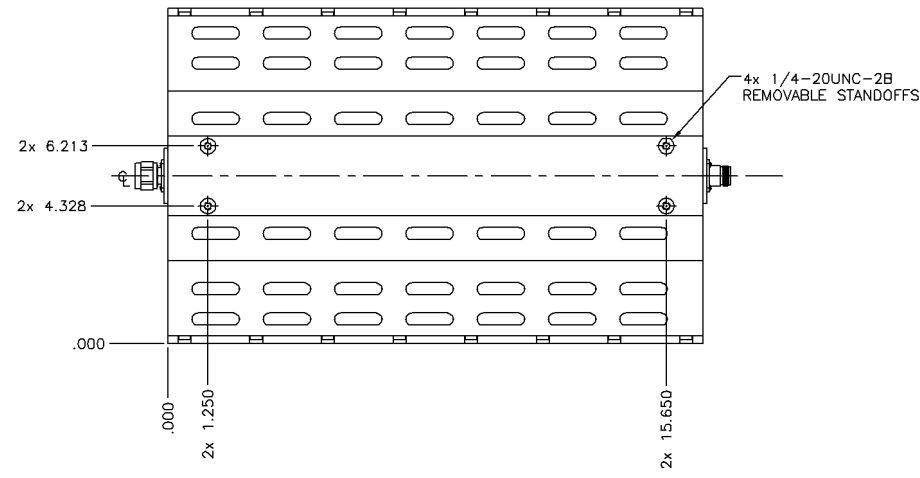
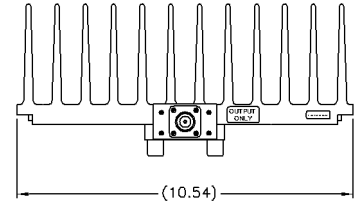
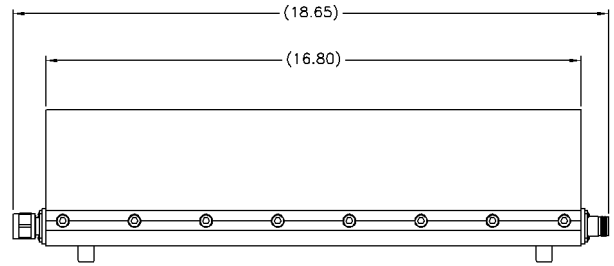



REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	CONVERT TO BTG FORMAT	7-1-11	

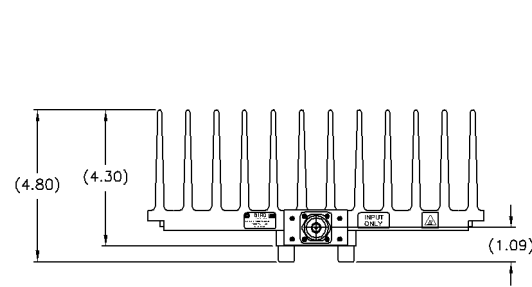

SPECIFICATIONS:
 IMPEDANCE: 50 OHMS NOMINAL
 FREQUENCY RANGE: DC TO 2.4GHz
 ATTENUATION VALUE: 40dB
 VSWR AND ATTENUATION ACCURACY:
 DC TO 1GHz AT 1.10:1 MAX., ±.8dB
 1GHz TO 2.4 GHz AT 1.25:1 MAX., ±2.0dB
 POWER RATING: 1000 WATTS AVG. (UNI-DIRECTIONAL) AT 25°C AMBIENT
 COOLING FIN: ALUMINUM, BLACK ANODIZED
 COVER: ALUMINUM, BLACK ANODIZED
 CONNECTORS: N-TYPE MALE/FEMALE, TRI-ALLOY PLATED
 OPERATING POSITION: ANY POSITION EXCEPT MOUNTING SURFACE UP
 NOMINAL SIZE: APPROX. 18.65" L X 10.54" W X 4.80" H
 WEIGHT: APPROX. 26.5 LBS

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS ±1/64 DECIMALS .xx = ±0.10 .xxx = ±0.005 ANGLES ±30° MILLIMETERS .x = ±.4 .xx = ±.12 DO NOT SCALE DRAWING		APPROVALS	DATE	 ATTENUATOR, CONVECTION COOLED, N-TYPE MALE/FEMALE, 40dB	
DRN	DMD	7-1-11			
CHK					
APP					
MATERIAL	CODE	TITLE			
FINISH	CODE	PROJ./LIB	SCALE	DWG. NO.	REV
		AUTOCAD	1:1	1000-WA-MFN-40	A
		CONM CODE	AT1	SHEET 1 OF 1	